

## SETUP SHEET




### TRACK CONDITIONS

Surface:  Smooth  Med.  Bumpy  
 Size:  Open  Med.  Tight  
 Traction:  High  Med.  Low

Track Temp/Air Temp: \_\_\_\_\_° / \_\_\_\_\_°  
 Note: \_\_\_\_\_

### FRONT SUSPENSION



Front Width: 199 mm

Anti-Roll Bar: 90°

Diff. Fluid: \_\_\_\_\_ wt

One Way

Solid Axle

Toe Angle: 0.5°

Front Camber: L 3.5° R 3.5°

Front Ride Height: 5.5 mm

Front Droop: 1 mm

Caster: 3 mm

► SHOCK

Shock Length: \_\_\_\_\_ mm

Thread Length: \_\_\_\_\_ mm

Oil: 35 wt

Piston: 2

Spring: 1,5 mm





► TIRE

Front Tire: GRP


Shore: L 40° R 40°

Diameter(Start): L/R 61 / 61 mm

Diameter(Finish): L/R \_\_\_ / \_\_\_ mm



### REAR SUSPENSION



Rear Width: 200 mm

Anti-Roll Bar: 0°

Diff. Fluid: 10000 wt

Solid Axle

Toe Angle: 2°

Rear Camber: L 4° R 4°

Rear Ride Height: 6.5 mm

Rear Droop: 3 mm

► SHOCK

Shock Length: \_\_\_\_\_ mm

Thread Length: \_\_\_\_\_ mm

Oil: 35 wt

Piston: 2

Spring: 1,4 mm



► TIRE

Front Tire: GRP


Shore: L 40° R 40°

Diameter(Start): L/R 63 / 63 mm

Diameter(Finish): L/R \_\_\_ / \_\_\_ mm



### Pulley

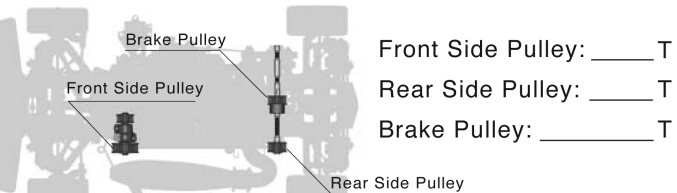


Front Side Pulley: \_\_\_\_\_ T

Rear Side Pulley: \_\_\_\_\_ T

Brake Pulley: \_\_\_\_\_ T

### ENGINE



Gear Ratio: 1st 19 T / 51 T

2nd 23 T / 46 T

Clutch Set Type:

3 Shoe  Push Type

Clutch Spring: 1.7 mm

Clutch weight: \_\_\_\_\_

Clutch Shoe: \_\_\_\_\_

Engine: KYOSHO CRF 2007

Plug: 6

Fuel: TORNADO 16%


Manifold: CRF

Pipe: CRF 2647

Pipe Length: \_\_\_\_\_ mm

Note: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

### Body

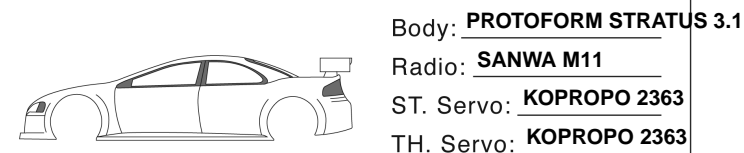

Body: PROTOFORM STRATUS 3.1

Radio: SANWA M11

ST. Servo: KOPROPO 2363

TH. Servo: KOPROPO 2363

### COMMENTS

Race Time / Lap: \_\_\_\_\_

Best Lap Time: \_\_\_\_\_

Position: \_\_\_\_\_

Notes: \_\_\_\_\_